
Innovative tools for neurovascular interventions

The Cascade device features CEREBRAL NET™ technology, an adjustable braided net configuration that allows device manipulation for complex neurovascular conditions.

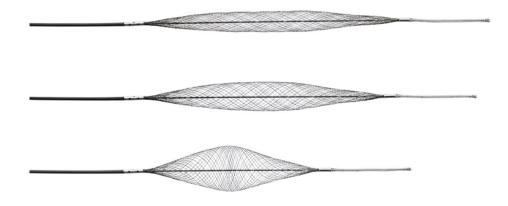

FULL CONTROL UNDER YOUR COMMAND

Make real-time informed decisions to improve patient outcomes.

OPTIMIZE COMPLIANCE

Responsive braided net provides excellent compliance with vessel geometry.



Empowering Physicians. Caring for Patients.

4 Hatzoran St., Netanya 4250604, Israel +972-3-6544011 www.perflow.com

CASCADE

Non-Occlusive Remodeling Net



Please consult product labels and inserts for any indications, contraindications, hazards, warnings, precautions and instructions for use.


© 2019 Perflow Medical All Rights Reserved.

Perflow products are not available for sale in the United States.

LB0015 Rev04


Confident Control




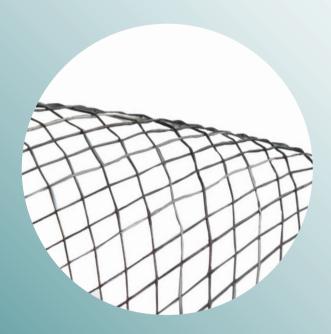

The Cascade[™] Net empowers physicians with non-occlusive support, full device control and excellent visibility during coil embolization of intracranial aneurysms.

Focus on Repair

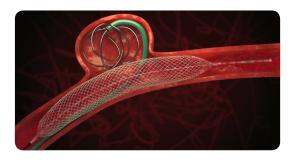



Support with Perfusion

Cascade keeps coils in place while enabling blood flow through the device.

Treatment Centered

Cascade does not limit the procedure time allowing to safely treat the aneurysm.

A Perfect Balance

The right balance between rigidity and flexibility provides a straight non-contorted shape.


Architectural Edge

Optimized Cell Size

Densely braided net creates a physical barrier that prevents coil protrusion and possible entanglement.

Evenly Distributed Radial Force

Thin wires provide compliance with vessel geometry and no pressure points on the artery wall.



Predictable Support


Operator manipulations correspond to expected behavior of the braided net.

Reliable and Adaptable

Adjust length by partially re-sheathing the net with a microcatheter.

Excellent Radiopacity

The device is visible throughout the procedure.

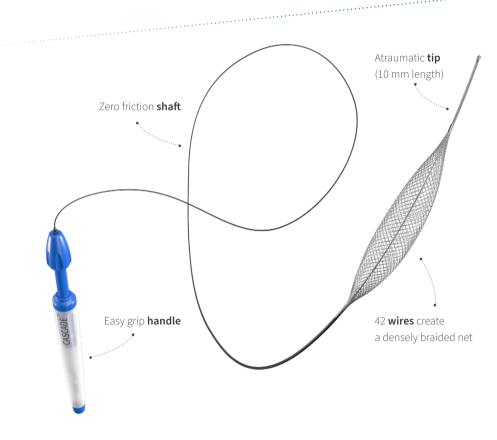

A perfect fit, every time

Model	Catalog number	Maximal braid length	Actuation shaft length	Effective braid diameter	Recommended Vessel Diameter	Microcatheter Min ID
Cascade 17	FG0009	18 mm	191 cm	0.4-3 mm	1.5-3 mm	0.017"
Cascade M	FG0006	37 mm	193 cm	0.5-4 mm	2-4 mm	0.021"
Cascade M Agile	FG0008	21 mm	191 cm			
Cascade L	FG0005	37 mm	193 cm	0.5-6 mm	4-6 mm	
Cascade L <i>Agile</i>	FG0007	21 mm	191 cm			